MUNICIPAL RECREATION COURTS

DEMONSTRATION PACKAGE 001

FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1 — CHAIN LINK FENCING AND GATES

FICTIONAL SYNTHETIC DEMONSTRATION

NOT FOR CONSTRUCTION

NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER.

DESIGNER OF RECORD: NONE. PREPARED BY IFI LABS / SYNTHETIC CAD FOR SOFTWARE TESTING.

OWNER, SITE AND PROJECT ARE FICTIONAL. NO REAL ADDRESS.

ITEM	PROJECT DATA
PROJECT	MUNICIPAL RECREATION COURTS — DEMONSTRATION PACKAGE 001
PROJECT NO.	DP-001
OWNER	FICTIONAL MUNICIPAL OWNER (DEMONSTRATION ONLY)
ISSUE	ISSUED FOR BID (SYNTHETIC)
ISSUE DATE	OCTOBER 12, 2026
REVISION	0
SPECIFICATION	SECTION 32 31 13 - CHAIN LINK FENCES AND GATES
OTHER DOCUMENTS	LABOR-COMPLIANCE DOCUMENTS; ADDENDA ISSUED DURING THE BID PERIOD

DRAWING INDEX

SHEET	TITLE	SEQ.
G001	COVER / GENERAL NOTES / DRAWING INDEX	1
C101	SITE / FENCE PLAN — BASE BID AND ALTERNATE A-1	2
C102	BID SCHEDULES AND QUANTITY BASIS	3
F501	FENCE AND FOOTING DETAILS — TYPES A AND B	4
F502	GATE AND WINDSCREEN DETAILS — G1, G2, G3, WINDSCREEN	5

GENERAL NOTES

1. THIS DRAWING SET IS A FICTIONAL SYNTHETIC DEMONSTRATION PACKAGE PREPARED BY IFI LABS / SYNTHETIC CAD FOR ESTIMATING-SOFTWARE TESTING. IT IS NOT FOR CONSTRUCTION. NO PART OF IT HAS BEEN PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER. THE OWNER, SITE AND PROJECT ARE FICTIONAL.
2. THE CONTRACT DOCUMENTS CONSIST OF THESE DRAWINGS (G001, C101, C102, F501, F502), SECTION 32 31 13 – CHAIN LINK FENCES AND GATES, THE LABOR-COMPLIANCE DOCUMENTS AND ALL ADDENDA ISSUED DURING THE BID PERIOD.
3. ADDENDA TAKE PRECEDENCE OVER THE DRAWINGS AND SPECIFICATIONS THEY MODIFY. BIDDERS SHALL ACKNOWLEDGE EACH ADDENDUM ON THE BID FORM.
4. WORK INCLUDES: TYPE A 10'-0" PERIMETER CHAIN LINK FENCE, TYPE B 42" DIVIDER FENCE, SWING GATES G1, G2 AND G3, POST FOOTINGS AND WINDSCREEN, FOR THE BASE BID FOUR-COURT ENCLOSURE OR, IF ACCEPTED, BID ALTERNATE A-1 THREE-COURT ENCLOSURE.
5. WORK BY OTHERS: COURT PAVEMENT, SURFACING, PLAYING LINES, NETS, NET POSTS, CONCRETE WALKS AND SITE UTILITIES.
6. DIMENSIONS ARE TO CENTERLINE OF POSTS UNLESS NOTED OTHERWISE. DO NOT SCALE DRAWINGS. DETAILS NOTED AS DIAGRAMMATIC OR N.T.S. SHALL NOT BE SCALED.
7. BIDDERS SHALL DETERMINE THEIR OWN QUANTITIES FROM THE CONTRACT DOCUMENTS. SEE C102.
8. QUESTIONS AND REQUESTS FOR INFORMATION SHALL BE SUBMITTED IN WRITING BEFORE THE QUESTION DEADLINE STATED IN THE BID DOCUMENTS.
9. LABOR COMPLIANCE: BIDDERS SHALL VERIFY WHICH FEDERAL, STATE OR LOCAL PREVAILING-WAGE, CLASSIFICATION AND CERTIFIED-PAYROLL OBLIGATIONS APPLY. APPLICABILITY IS NOT DETERMINED BY THESE DRAWINGS. SEE THE LABOR-COMPLIANCE DOCUMENTS.

CONTRACT DOCUMENT HIERARCHY

1. ADDENDA (MOST RECENT GOVERNS).
2. SECTION 32 31 13 – CHAIN LINK FENCES AND GATES.
3. DETAIL SHEETS F501 AND F502.
4. PLAN SHEET C101 AND SCHEDULE SHEET C102.
5. COVER SHEET G001.
6. WHERE DOCUMENTS CONFLICT AND NO ADDENDUM RESOLVES THE CONFLICT, SUBMIT AN RFI BEFORE THE QUESTION DEADLINE.

ABBREVIATIONS

CL	CENTERLINE	**N.T.S.**	NOT TO SCALE
CONC.	CONCRETE	**O.C.**	ON CENTER
EA	EACH	**O.D.**	OUTSIDE DIAMETER
GA.	GAUGE	**RFI**	REQUEST FOR INFORMATION
LF	LINEAR FOOT	**TYP.**	TYPICAL
LS	LUMP SUM	**U.N.O.**	UNLESS NOTED OTHERWISE
MAX.	MAXIMUM	**WS**	WINDSCREEN

SHEET CONVENTIONS

- **#** / **F5##** — DETAIL NUMBER / SHEET WHERE DRAWN
- **A** — FENCE TYPE TAG
- **G#** — GATE TAG (SIZES PER F502, SECTION 32 31 13 AND ADDENDA)
- **#** — KEYNOTE

EVERY SHEET IN THIS SET IS GENERATED FROM ONE FREECAD MASTER MODEL (DP001_Master.FCStd) BY TECHDRAW.

IFI LABS
SYNTHETIC CAD

FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL
SYNTHETIC DEMONSTRATION
NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER

PROJECT
MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master.FCStd


SHEET TITLE
COVER / GENERAL NOTES
DRAWING INDEX AND PROJECT DATA

SHEET NUMBER
G001
SHEET 1 OF 5

DRAWING INDEX
- **G001** COVER, GENERAL NOTES AND INDEX
- **C101** SITE / FENCE PLAN
- **C102** BID SCHEDULES AND QUANTITIES
- **F501** FENCE AND FOOTING DETAILS
- **F502** GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL


FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION

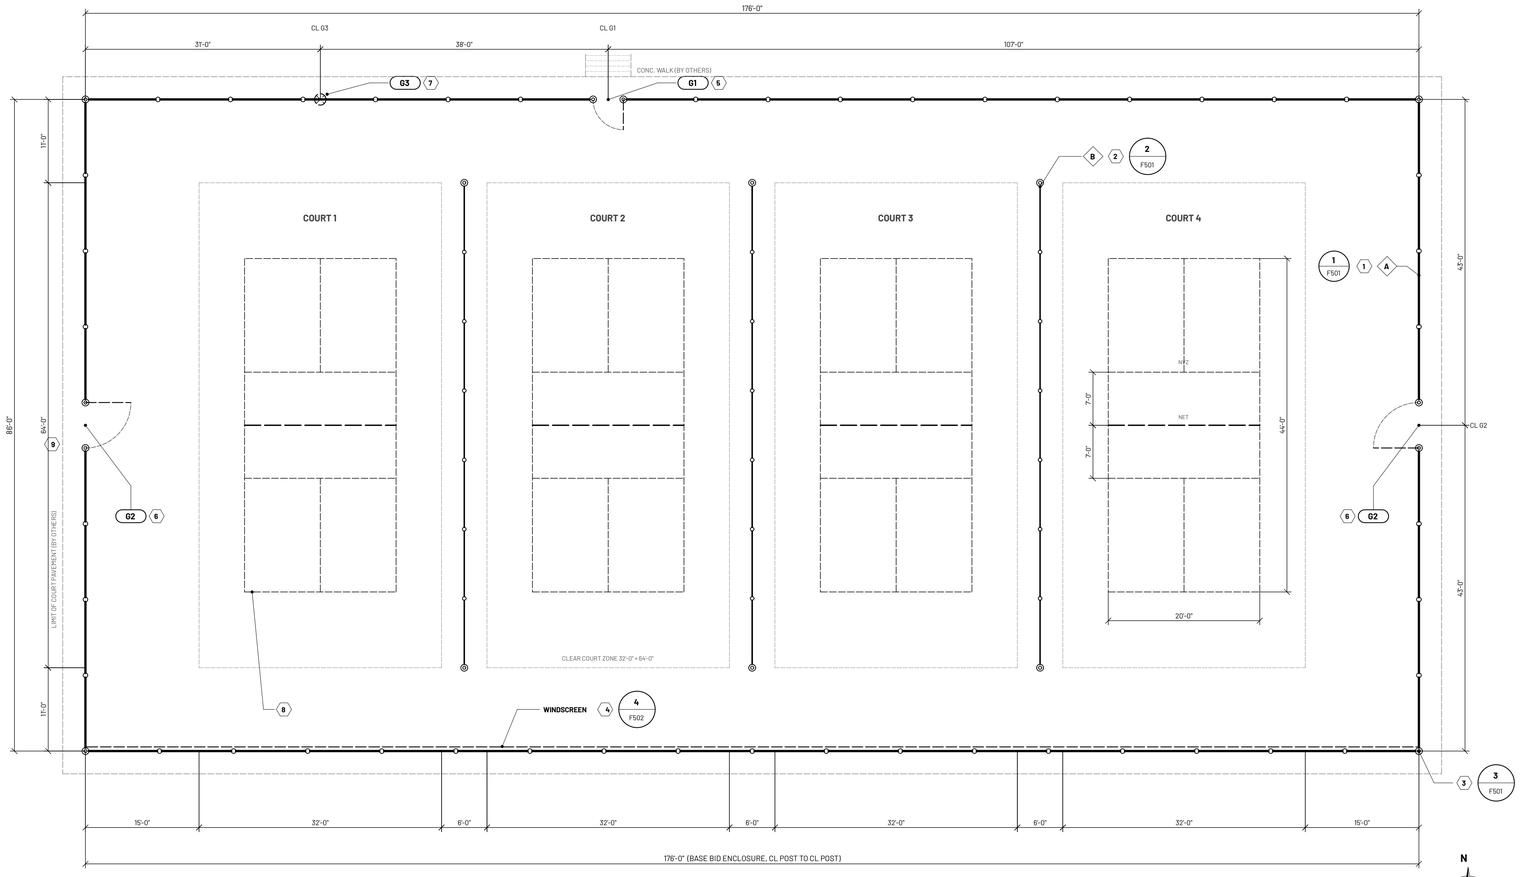

1 C101 SITE / FENCE PLAN — BASE BID (FOUR COURTS)

SCALE: 1" = 10'-0" (ANSI D, 22" × 34")

0 10 20 40 FEET

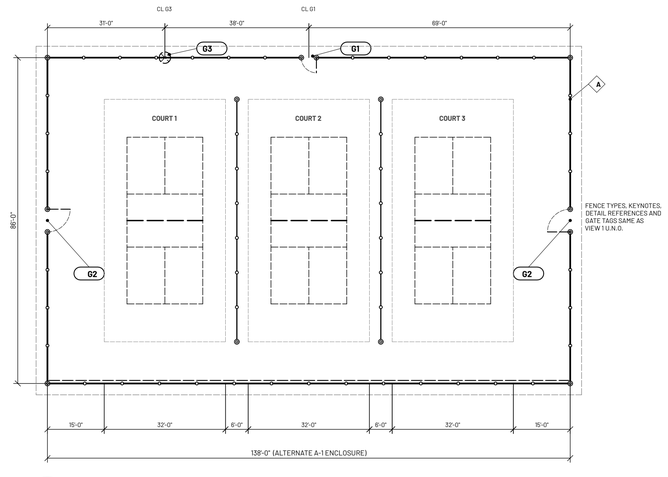

2 C101 BID ALTERNATE A-1 — THREE-COURT ENCLOSURE (IN LIEU OF BASE BID)

SCALE: 1" = 20'-0"

0 20 40 80 FEET

GENERAL NOTES

1. THIS SHEET IS PART OF A FICTIONAL SYNTHETIC DEMONSTRATION PACKAGE PREPARED BY IFI LABS / SYNTHETIC CAD. IT IS NOT FOR CONSTRUCTION AND HAS NOT BEEN PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER.
2. DIMENSIONS ARE TO CENTERLINE OF POSTS UNLESS NOTED OTHERWISE. DO NOT SCALE DRAWINGS; WRITTEN DIMENSIONS GOVERN.
3. GATE OPENING SIZES ARE NOT SHOWN ON THIS SHEET. REFER TO THE GATE DETAILS, SECTION 32 31 13 AND ANY ADDENDA FOR GATE REQUIREMENTS.
4. SPACE LINE POSTS EQUALLY BETWEEN CORNER, TERMINAL AND GATE POSTS AT 10'-0" O.C. MAXIMUM.
5. FABRIC, FRAMEWORK, FITTINGS, FOOTINGS AND INSTALLATION SHALL CONFORM TO SECTION 32 31 13 – CHAIN LINK FENCES AND GATES, AND TO SHEETS F501 AND F502.
6. COURT PAVEMENT, SURFACING, PLAYING LINES, NETS AND NET POSTS ARE BY OTHERS AND ARE SHOWN FOR REFERENCE ONLY. COORDINATE POST LOCATIONS WITH PAVEMENT CONTRACTOR BEFORE PLACEMENT.
7. VERIFY ALL DIMENSIONS AND LAYOUT IN THE FIELD BEFORE SETTING POSTS. REPORT DISCREPANCIES TO THE OWNER'S REPRESENTATIVE IN WRITING AND AWAIT DIRECTION.
8. BID ALTERNATE A-1 (THREE-COURT ENCLOSURE, VIEW 2) IS BID IN LIEU OF THE BASE BID FOUR-COURT ENCLOSURE (VIEW 1). EACH OPTION SHALL BE QUANTIFIED INDEPENDENTLY. SEE C102.
9. LABOR COMPLIANCE: THE CONTRACTOR SHALL VERIFY WHETHER FEDERAL (DAVIS-BACON), STATE OR LOCAL PREVAILING-WAGE REQUIREMENTS, TRADE CLASSIFICATIONS AND CERTIFIED-PAYROLL OBLIGATIONS APPLY, AS STATED IN THE CONTRACT LABOR-COMPLIANCE DOCUMENTS. APPLICABILITY IS NOT ESTABLISHED BY THESE DRAWINGS. SUBMIT A WRITTEN REQUEST FOR CLARIFICATION BEFORE THE QUESTION DEADLINE.
10. LOCATE AND PROTECT ALL UNDERGROUND UTILITIES THROUGH THE STATE ONE-CALL SYSTEM BEFORE EXCAVATING FOR POST FOOTINGS.
11. ADDENDA ISSUED DURING THE BID PERIOD SUPERSEDE CONFLICTING INFORMATION ON THIS SHEET.

KEYNOTES

1. 10'-0" HIGH CHAIN LINK FENCE, TYPE A. SEE 1/F501.
2. 42" HIGH CHAIN LINK DIVIDER FENCE, TYPE B, CENTERED IN WALKWAY BETWEEN CLEAR COURT ZONES. TERMINATE EACH END AT A TERMINAL POST IN LINE WITH THE CLEAR COURT ZONE LIMIT; 11'-0" OPEN CIRCULATION AISLE TO PERIMETER FENCE (NO GATE). SEE 2/F501.
3. CORNER POST WITH BRACE RAIL AND TRUSS ROD EACH DIRECTION. TYPICAL AT ALL CORNERS. FOOTINGS PER 3/F501.
4. WINDSCREEN ON INSIDE FACE OF SOUTH FENCE, FULL LENGTH BETWEEN CORNER POSTS. SEE 4/F502.
5. GATE G1. SEE 1/F502 AND SECTION 32 31 13.
6. GATE G2, TWO LOCATIONS. SEE 2/F502 AND SECTION 32 31 13.
7. GATE G3, LOCATION SHOWN BY SYMBOL ONLY, NOT TO SCALE; DO NOT SCALE OPENING FROM THIS SHEET. SEE 3/F502 AND SECTION 32 31 13.
8. PICKLEBALL PLAYING LINES, 20'-0" × 44'-0" WITH 7'-0" NON-VOLLEY ZONES (BY OTHERS).
9. LIMIT OF COURT PAVEMENT, 3'-0" OUTSIDE FENCE CENTERLINE (BY OTHERS).

ABBREVIATIONS

CL	CENTERLINE	**N.T.S.**	NOT TO SCALE
CONC.	CONCRETE	**O.C.**	ON CENTER
LOC.	LOCATION(S)	**TYP.**	TYPICAL
MAX.	MAXIMUM	**U.N.O.**	UNLESS NOTED OTHERWISE
NVZ	NON-VOLLEY ZONE	**WS**	WINDSCREEN

LEGEND

- 10'-0" HIGH CHAIN LINK FENCE — TYPE A
- 42" HIGH CHAIN LINK DIVIDER FENCE — TYPE B
- WINDSCREEN ON FENCE (INSIDE FACE)
- CORNER / TERMINAL / GATE POST
- LINE POST (10'-0" O.C. MAX.)
- SWING GATE AND LEAF SWING
- GATE LOCATION — SYMBOL ONLY, N.T.S.
- PICKLEBALL PLAYING LINES (BY OTHERS)
- CLEAR COURT ZONE LIMIT
- LIMIT OF COURT PAVEMENT (BY OTHERS)
- FENCE TYPE TAG (A)
- GATE TAG (G#)
- KEYNOTE (#)
- DETAIL NO. / SHEET NO. (# / C1##)

FENCE AND GATE REFERENCE

TAG	DESCRIPTION	DETAIL	SPEC.
A	CHAIN LINK FENCE, 10'-0" HIGH, PERIMETER	1/F501	32 31 13
B	CHAIN LINK DIVIDER FENCE, 42" HIGH	2/F501	32 31 13
—	POST FOOTINGS, ALL FENCE TYPES	3/F501	32 31 13
WS	WINDSCREEN, SOUTH FENCE	4/F502	32 31 13
G1	SWING GATE, PEDESTRIAN	1/F502	32 31 13
G2	SWING GATE, MAINTENANCE (2 LOC.)	2/F502	32 31 13
G3	SWING GATE, SERVICE	3/F502	32 31 13

GATE SIZES, FRAMING AND HARDWARE ARE NOT SCHEDULED ON THIS SHEET.
REFER TO DETAIL SHEETS, SECTION 32 31 13 AND ADDENDA.

BID QUANTITIES: SEE C102 BID SCHEDULES.

IFI LABS
SYNTHETIC CAD
FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL
SYNTHETIC DEMONSTRATION
NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER

PROJECT
MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master.FCStd

SHEET TITLE
SITE / FENCE PLAN
BASE BID AND ALTERNATE A-1

SHEET NUMBER
C101
SHEET 2 OF 5

DRAWING INDEX

G001	COVER, GENERAL NOTES AND INDEX
C101	SITE / FENCE PLAN
C102	BID SCHEDULES AND QUANTITIES
F501	FENCE AND FOOTING DETAILS
F502	GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL

SCHEDULE 1 — BASE BID (FOUR-COURT ENCLOSURE, C101 VIEW 1)

ITEM	DESCRIPTION	UNIT	QUANTITY	REFERENCE	UNIT PRICE / AMOUNT
1	MOBILIZATION, BONDS, INSURANCE AND GENERAL CONDITIONS	LS	1	—	$ _____
2	LAYOUT, UTILITY LOCATES AND SITE CLEANUP	LS	1	C101	$ _____
3	CHAIN LINK FENCE, TYPE A, 10'-0" HIGH, COMPLETE IN PLACE (EXCLUDES GATE CLEAR OPENINGS)	LF	BY BIDDER	1/F501, 3/F501	$ _____
4	CHAIN LINK DIVIDER FENCE, TYPE B, 42" HIGH, COMPLETE IN PLACE	LF	BY BIDDER	2/F501, 3/F501	$ _____
5	WINDSCREEN ON SOUTH TYPE A FENCE	LF	BY BIDDER	4/F502	$ _____
6	GATE G1, PEDESTRIAN SWING GATE, COMPLETE	EA	1	1/F502	$ _____
7	GATE G2, MAINTENANCE SWING GATE, COMPLETE	EA	2	2/F502	$ _____
8	GATE G3, SERVICE SWING GATE, COMPLETE (CLEAR OPENING: SEE NOTE 4/F502 — SUBMIT RFI)	EA	1	3/F502	$ _____

TOTAL BASE BID (ITEMS 1–8): $ _____

SCHEDULE 2 — BID ALTERNATE A-1 (THREE-COURT ENCLOSURE, C101 VIEW 2), IN LIEU OF BASE BID

ITEM	DESCRIPTION	UNIT	QUANTITY	REFERENCE	UNIT PRICE / AMOUNT
1	MOBILIZATION, BONDS, INSURANCE AND GENERAL CONDITIONS	LS	1	—	$ _____
2	LAYOUT, UTILITY LOCATES AND SITE CLEANUP	LS	1	C101	$ _____
3	CHAIN LINK FENCE, TYPE A, 10'-0" HIGH, COMPLETE IN PLACE (EXCLUDES GATE CLEAR OPENINGS)	LF	BY BIDDER	1/F501, 3/F501	$ _____
4	CHAIN LINK DIVIDER FENCE, TYPE B, 42" HIGH, COMPLETE IN PLACE	LF	BY BIDDER	2/F501, 3/F501	$ _____
5	WINDSCREEN ON SOUTH TYPE A FENCE	LF	BY BIDDER	4/F502	$ _____
6	GATE G1, PEDESTRIAN SWING GATE, COMPLETE	EA	1	1/F502	$ _____
7	GATE G2, MAINTENANCE SWING GATE, COMPLETE	EA	2	2/F502	$ _____
8	GATE G3, SERVICE SWING GATE, COMPLETE (CLEAR OPENING: SEE NOTE 4/F502 — SUBMIT RFI)	EA	1	3/F502	$ _____

TOTAL BID ALTERNATE A-1 (ITEMS 1–8): $ _____

MEASUREMENT AND PAYMENT

ITEM	METHOD OF MEASUREMENT
TYPE A FENCE	LF ALONG FENCE CENTERLINE, CENTER OF END POST TO CENTER OF END POST, LESS GATE CLEAR OPENINGS
TYPE B FENCE	LF ALONG FENCE CENTERLINE BETWEEN TERMINAL POSTS
WINDSCREEN	LF OF FENCE COVERED, BETWEEN CORNER POSTS
GATES	EACH, INCLUDING GATE POSTS, FOOTINGS, HEADER, FIXED FABRIC ABOVE AND HARDWARE
LUMP SUM	COMPLETE, NOT MEASURED

BID SCHEDULE NOTES

1. BIDDERS SHALL DETERMINE ALL LINEAR-FOOT QUANTITIES FROM THE CONTRACT DOCUMENTS, INCLUDING ADDENDA. QUANTITIES ARE NOT FURNISHED BY THE OWNER FOR LF ITEMS; THE OWNER DOES NOT WARRANT ANY QUANTITY.
2. TYPE A FENCE IS MEASURED ALONG THE FENCE CENTERLINE BETWEEN CENTERS OF END POSTS, EXCLUDING GATE CLEAR OPENINGS. GATES ARE PAID PER EACH UNDER THEIR OWN ITEMS.
3. GATE COUNTS ARE FURNISHED FOR INFORMATION. GATE G3 CLEAR OPENING IS NOT SPECIFIED (SEE NOTE 4/F502); BIDDERS SHALL SUBMIT AN RFI BEFORE THE QUESTION DEADLINE AND SHALL STATE ANY ASSUMPTION ON THE BID FORM.
4. POST FOOTINGS, BRACING, HARDWARE, TENSION WIRE AND ALL ACCESSORIES ARE INCLUDED IN THE FENCE AND GATE ITEMS.
5. BID ALTERNATE A-1 IS BID IN LIEU OF THE BASE BID. EACH SCHEDULE IS COMPLETE IN ITSELF.
6. ADDENDA ISSUED DURING THE BID PERIOD MAY MODIFY GATE SIZES AND THEREFORE NET FENCE LENGTHS. INCLUDE ALL ADDENDA IN THE BID.
7. LABOR COMPLIANCE: BIDDERS SHALL VERIFY APPLICABLE PREVAILING-WAGE OBLIGATIONS PER THE LABOR-COMPLIANCE DOCUMENTS; INCLUDE ALL RESULTING COSTS IN THE UNIT AND LUMP-SUM PRICES.

QUANTITY BASIS

1. QUANTITY ENTRIES OF "BY BIDDER" MEAN THE CONTRACTOR SHALL DETERMINE THE QUANTITY FROM THE CONTRACT DOCUMENTS. NO OWNER QUANTITY IS PROVIDED FOR THESE ITEMS.
2. GATE COUNTS (EA) ARE TAKEN FROM C101 AND F502 AND ARE THE SAME FOR BOTH SCHEDULES.
3. BID ON THE BASIS OF ALL ADDENDA ACKNOWLEDGED ON THE BID FORM.

IFI LABS
SYNTHETIC CAD
FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL
SYNTHETIC DEMONSTRATION
NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER

PROJECT
MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	NONE
CAD FILE	DP001_Master.FCStd


SHEET TITLE
BID SCHEDULES
BID ITEMS AND QUANTITY BASIS

SHEET NUMBER
C102
SHEET 3 OF 5

DRAWING INDEX


G001 COVER, GENERAL NOTES AND INDEX
C101 SITE / FENCE PLAN
C102 BID SCHEDULES AND QUANTITIES
F501 FENCE AND FOOTING DETAILS
F502 GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL

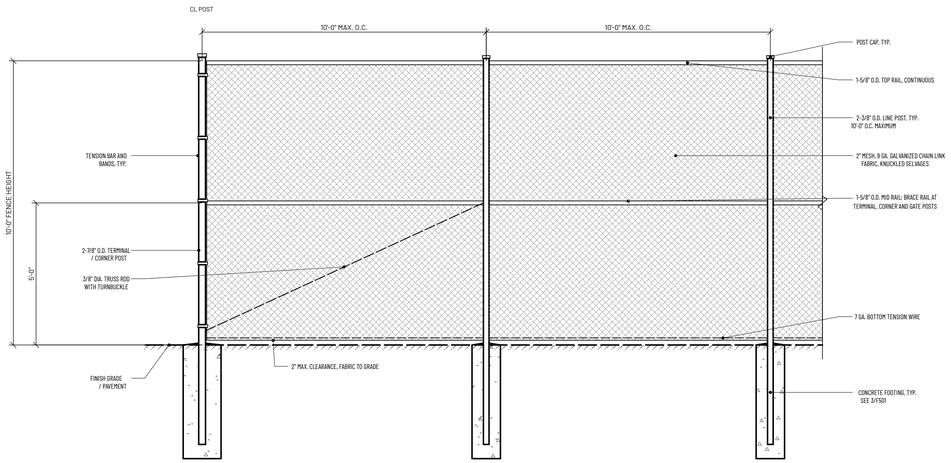

1 / F501 — TYPE A — 10'-0" CHAIN LINK FENCE ELEVATION

SCALE: 3/8" = 1'-0"

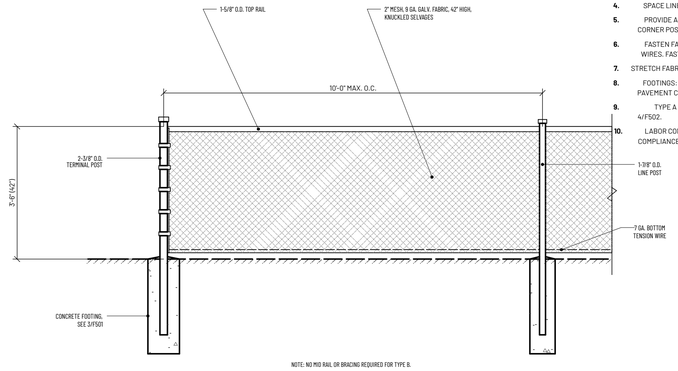


NOTE: NO MID RAIL OR BRACING REQUIRED FOR TYPE B.

2 / F501 — TYPE B — 42" DIVIDER FENCE ELEVATION

SCALE: 1/2" = 1'-0"

DETAIL NOTES

1. THIS SHEET IS PART OF A FICTIONAL SYNTHETIC DEMONSTRATION PACKAGE. NOT FOR CONSTRUCTION. NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER.
2. FENCE LOCATIONS, TYPES AND GATE LOCATIONS ARE SHOWN ON C101. GATE DETAILS AND WINDSCREEN ARE ON F502.
3. ALL FRAMEWORK SHALL BE HOT-DIP GALVANIZED STEEL PIPE. PIPE SIZES ARE OUTSIDE DIAMETERS. MATERIALS AND WEIGHTS PER SECTION 32 31 13 – CHAIN LINK FENCES AND GATES.
4. SPACE LINE POSTS EQUALLY BETWEEN TERMINAL, CORNER AND GATE POSTS AT 10'-0" O.C. MAXIMUM.
5. PROVIDE A HORIZONTAL BRACE RAIL AND DIAGONAL TRUSS ROD AT EACH TERMINAL AND GATE POST AND IN EACH DIRECTION AT CORNER POSTS (TYPE A ONLY).
6. FASTEN FABRIC TO LINE POSTS AT 12" O.C. AND TO RAILS AND TENSION WIRE AT 24" O.C. WITH 9 GA. ALUMINUM TIE WIRES. FASTEN TO TERMINAL POSTS WITH TENSION BARS AND BANDS.
7. STRETCH FABRIC TAUT AND INSTALL ON THE COURT (INSIDE) FACE OF POSTS.
8. FOOTINGS: SEE 3/F501. CROWN TOP OF CONCRETE TO SHED WATER. COORDINATE FOOTINGS LOCATED IN COURT PAVEMENT WITH PAVEMENT CONTRACTOR.
9. TYPE A FENCE CARRYING WINDSCREEN (SOUTH FENCE, SEE C101) USES THE SAME POST AND FOOTING SIZES SHOWN. SEE 4/F502.
10. LABOR COMPLIANCE: THE CONTRACTOR SHALL VERIFY APPLICABLE PREVAILING-WAGE OBLIGATIONS PER THE CONTRACT LABOR-COMPLIANCE DOCUMENTS (SEE C101 GENERAL NOTE 9).

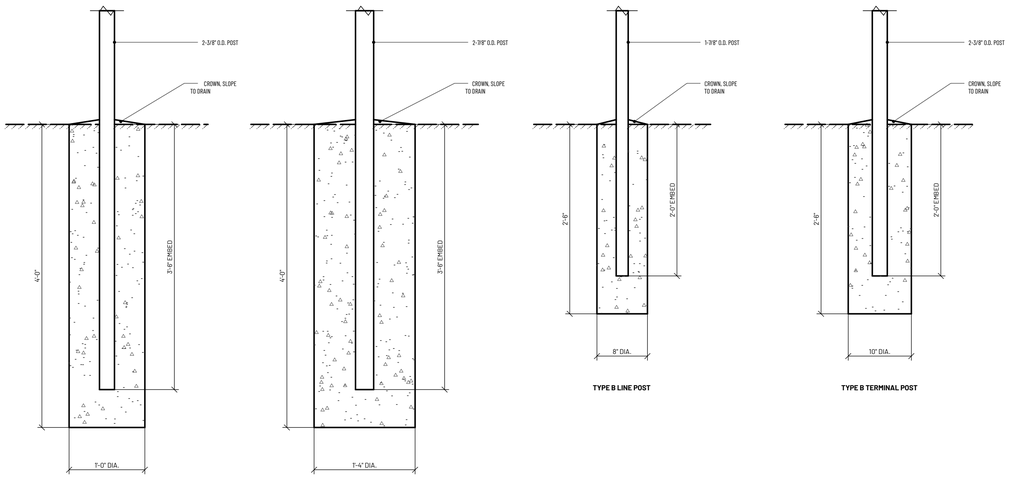

CONCRETE: PER SECTION 32 31 13. SET POSTS PLUMB; BRACE UNTIL CONCRETE HAS CURED. FOOTING DEPTHS ARE MINIMUMS BELOW FINISH GRADE.

3 / F501 — POST FOOTING SECTIONS

SCALE: 1" = 1'-0"

FENCE MATERIAL SCHEDULE

COMPONENT	TYPE A — 10'-0" PERIMETER	TYPE B — 42" DIVIDER
FABRIC	2" MESH, 9 GA. CORE, GALV., 10'-0" NOMINAL HEIGHT, KK/KK	2" MESH, 9 GA. CORE, GALV., 42" HEIGHT, KK/KK
LINE POST	2-3/8" O.D., 10'-0" O.C. MAX.	1-7/8" O.D., 10'-0" O.C. MAX.
TERMINAL / CORNER POST	2-7/8" O.D.	2-3/8" O.D.
GATE POST	SEE F502 GATE SCHEDULE	N/A
TOP RAIL	1-5/8" O.D., CONTINUOUS	1-5/8" O.D., CONTINUOUS
MID RAIL / BRACE RAIL	1-5/8" O.D. AT 5'-0"	NONE
TRUSS ROD	3/8" DIA. W/ TURNBUCKLE AT EA. BRACE	NONE
BOTTOM TENSION WIRE	7 GA. COIL SPRING, 3" ABOVE GRADE	7 GA. COIL SPRING, 3" ABOVE GRADE
FOOTING — LINE POST	1'-0" DIA. × 4'-0" DEEP	8" DIA. × 2'-6" DEEP
FOOTING — TERMINAL / GATE	1'-4" DIA. × 4'-0" DEEP	10" DIA. × 2'-6" DEEP
DETAIL	1/F501, 3/F501	2/F501, 3/F501

IFI LABS

SYNTHETIC CAD

FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL
SYNTHETIC DEMONSTRATION
NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER

PROJECT

MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master.FCStd

SHEET TITLE

FENCE AND FOOTING DETAILS
FENCE TYPES A AND B

SHEET NUMBER

F501


SHEET 4 OF 5

DRAWING INDEX

G001 COVER, GENERAL NOTES AND INDEX
C101 SITE / FENCE PLAN
C102 BID SCHEDULES AND QUANTITIES
F501 FENCE AND FOOTING DETAILS
F502 GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL

FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION

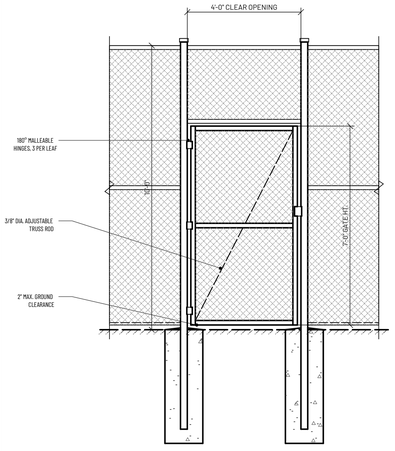


FACE OF GATE POST TO FACE OF GATE POST

1 F502

GATE G1 — PEDESTRIAN SWING GATE

SCALE: 3/8" = 1'-0"

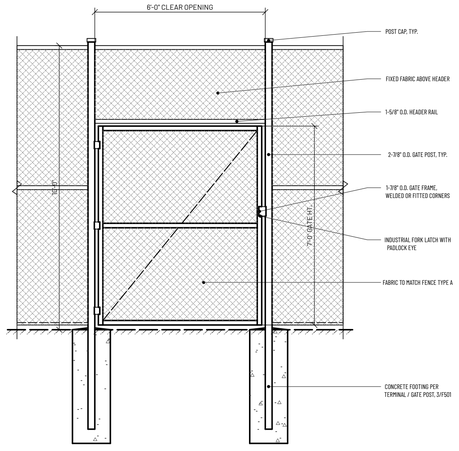


FACE OF GATE POST TO FACE OF GATE POST

2 F502

GATE G2 — MAINTENANCE SWING GATE

SCALE: 3/8" = 1'-0"

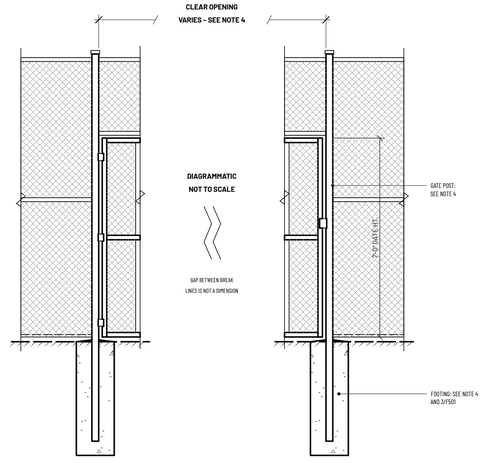

HARDWARE, FRAME AND FABRIC AS FOR G1 / G2 U.N.O.


3 F502

GATE G3 — SERVICE SWING GATE

N.T.S. — DIAGRAMMATIC

GATE AND WINDSCREEN NOTES

1. THIS SHEET IS PART OF A FICTIONAL SYNTHETIC DEMONSTRATION PACKAGE. NOT FOR CONSTRUCTION. NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER.
2. GATE LOCATIONS ARE SHOWN ON C101. GATES SWING INTO THE COURT ENCLOSURE. PROVIDE GATE STOPS / HOLD-BACKS PER SECTION 32 31 13.
3. GATE FRAMES: HOT-DIP GALVANIZED STEEL PIPE, FABRIC TO MATCH ADJACENT FENCE. PROVIDE A HEADER RAIL BETWEEN GATE POSTS WITH FIXED FABRIC ABOVE TO TOP OF FENCE.
4. GATE G3: THE CLEAR OPENING WIDTH IS NOT SPECIFIED IN THE CONTRACT DOCUMENTS AND VARIES. DETAIL 3/F502 IS DIAGRAMMATIC; THE DISTANCE BETWEEN THE BREAK LINES IS NOT A DIMENSION. DO NOT SCALE. BIDDERS SHALL SUBMIT A WRITTEN REQUEST FOR INFORMATION (RFI) BEFORE THE QUESTION DEADLINE. GATE POST SIZE AND FOOTING FOR G3 WILL BE CONFIRMED WITH THE RESPONSE.
5. GATE POSTS AND FOOTINGS NOT OTHERWISE NOTED: SEE TERMINAL / GATE POST FOOTING, 3/F501.
6. WINDSCREEN: INSTALL ON INSIDE FACE OF THE SOUTH TYPE A FENCE, FULL LENGTH BETWEEN CORNER POSTS (SEE C101). LAP OR BUTT PANEL ENDS AT POSTS ONLY.
7. ADDENDA ISSUED DURING THE BID PERIOD SUPERSEDE CONFLICTING INFORMATION ON THIS SHEET.
8. LABOR COMPLIANCE: THE CONTRACTOR SHALL VERIFY APPLICABLE PREVAILING-WAGE OBLIGATIONS PER THE CONTRACT LABOR-COMPLIANCE DOCUMENTS (SEE C101 GENERAL NOTE 9).

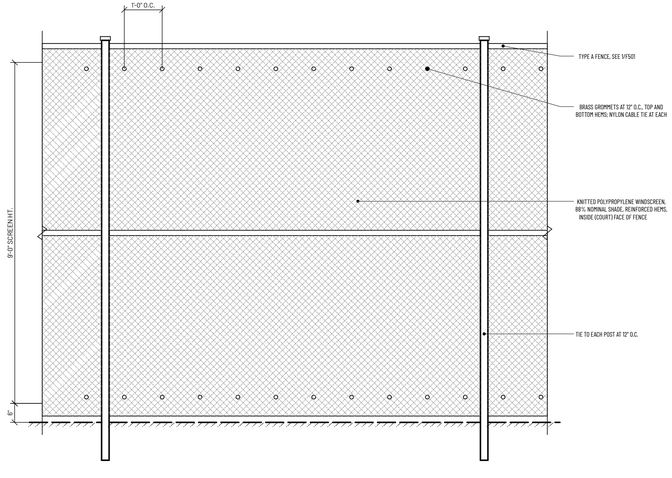

4 F502

WINDSCREEN ELEVATION — SOUTH FENCE (VIEWED FROM OUTSIDE)

SCALE: 1/2" = 1'-0"

GATE SCHEDULE

TAG	TYPE	CLEAR OPENING	HEIGHT	LEAVES	GATE POST	FRAME	HINGES	LATCH	QTY BASE	QTY ALT A-1	DETAIL
G1	PEDESTRIAN SWING	4'-0"	7'-0"	1	2-7/8" O.D.	1-3/8" O.D.	3 PER LEAF	FORK, PADLOCK EYE	1	1	1/F502
G2	MAINTENANCE SWING	6'-0"	7'-0"	1	2-7/8" O.D.	1-3/8" O.D.	3 PER LEAF	FORK, PADLOCK EYE	2	2	2/F502
G3	SERVICE SWING	VARIES – SEE NOTE 4	7'-0"	1	SEE NOTE 4	1-3/8" O.D.	3 PER LEAF	FORK, PADLOCK EYE	1	1	3/F502

QUANTITIES ARE GATE COUNTS PER OPTION (EA). CLEAR OPENING IS FACE OF POST TO FACE OF POST. BID QUANTITIES: SEE C102.

GATE HARDWARE

HARDWARE ITEM	G1	G2	G3
HINGES	180° MALLEABLE, 3 PER LEAF	180° MALLEABLE, 3 PER LEAF	180° MALLEABLE, 3 PER LEAF
LATCH	FORK LATCH, PADLOCK EYE	FORK LATCH, PADLOCK EYE	FORK LATCH, PADLOCK EYE
HOLD-BACK / STOP	GATE HOLD-BACK	GATE HOLD-BACK	GATE HOLD-BACK
PADLOCK	BY OWNER	BY OWNER	BY OWNER
GATE POST FOOTING	3/F501 TERMINAL / GATE	3/F501 TERMINAL / GATE	SEE NOTE 4

IFI LABS
SYNTHETIC CAD

FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL
SYNTHETIC DEMONSTRATION
NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER

PROJECT
MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master.FCStd

SHEET TITLE
GATE AND WINDSCREEN DETAILS
GATES G1, G2, G3 AND WINDSCREEN

SHEET NUMBER
F502
SHEET 5 OF 5

DRAWING INDEX

G001 COVER, GENERAL NOTES AND INDEX
C101 SITE / FENCE PLAN
C102 BID SCHEDULES AND QUANTITIES
F501 FENCE AND FOOTING DETAILS
F502 GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL