MUNICIPAL RECREATION COURTS

FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1

PROJECT NO. DP-001 · DEMONSTRATION PACKAGE 001 · CHAIN LINK FENCES AND GATES

FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION. NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL. OWNER AND SITE ARE FICTIONAL.

DRAWING INDEX

SHEET	TITLE (PER LIST OF DRAWINGS)	SEQ.
G001	COVER AND GENERAL NOTES	1
C101	SITE / FENCE PLAN, BASE BID AND ALTERNATE A-1	2
C102	BID SCHEDULES	3
F501	FENCE AND FOOTING DETAILS	4
F502	GATE AND WINDSCREEN DETAILS	5

ITEM	PROJECT DATA
PROJECT	MUNICIPAL RECREATION COURTS — DEMONSTRATION PACKAGE 001
PROJECT NO.	DP-001
OWNER	FICTIONAL MUNICIPAL OWNER (DEMONSTRATION ONLY)
ARCHITECT / ENGINEER	IFI LABS / SYNTHETIC CAD (NO REGISTRATION CLAIMED)
ISSUE	ISSUED FOR BID (SYNTHETIC)
ISSUE DATE	OCTOBER 12, 2026
REVISION	0
PROJECT MANUAL	DIVISIONS 00 AND 01, SECTION 32 31 13, SPECIAL CONDITIONS
BIDDING REQUIREMENTS	DOCUMENT 00 0200 INSTRUCTIONS TO BIDDERS; BID SCHEDULES (C102)
QUESTIONS / BIDS	PER DOCUMENT 00 0200 AND ADDENDA

ABBREVIATIONS

CL	CENTERLINE	**LS**	LUMP SUM	**RFI**	REQUEST FOR INFORMATION
CONC.	CONCRETE	**MAX.**	MAXIMUM	**SC**	SPECIAL CONDITIONS
EA	EACH	**N.T.S.**	NOT TO SCALE	**TYP.**	TYPICAL
GA.	GAUGE	**O.C.**	ON CENTER	**U.N.O.**	UNLESS NOTED OTHERWISE
LF	LINEAR FOOT	**O.D.**	OUTSIDE DIAMETER	**WS**	WINDSCREEN

SHEET CONVENTIONS

- **#** / F5## — DETAIL NUMBER / SHEET WHERE DRAWN
- **A** — FENCE TYPE TAG
- **G#** — GATE TAG (SIZES PER F502, SECTION 32 31 13, 2.5 AND ADDENDA)
- **#** — KEYNOTE

EVERY SHEET IN THIS SET IS GENERATED FROM ONE FREECAD MASTER MODEL (DP001_Master_ANSI_B.FCStd, DERIVED FROM DP001_Master.FCStd) BY TECHDRAW.

GENERAL NOTES

1. FICTIONAL SYNTHETIC DEMONSTRATION PREPARED BY IFI LABS / SYNTHETIC CAD. NOT FOR CONSTRUCTION. NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER OR ARCHITECT. OWNER, SITE AND PROJECT ARE FICTIONAL.
2. THE CONTRACT DOCUMENTS ARE LISTED IN THE SPECIAL CONDITIONS (DEFINITIONS, E) AND IN DOCUMENT 00 0200, ARTICLE 8: ADDENDA; INSTRUCTIONS TO BIDDERS; BID SCHEDULES (C102); AGREEMENT; SPECIAL, SUPPLEMENTAL AND GENERAL CONDITIONS; DRAWINGS; DIVISION 01 AND SECTION 32 31 13.
3. ORDER OF PRECEDENCE PER SECTION 00 0800, SC-1.2: ADDENDA GOVERN OVER ALL OTHER CONTRACT DOCUMENTS; SPECIAL CONDITIONS OVER DIVISION 01 AND SPECIFICATION SECTIONS; SPECIFICATION SECTIONS OVER THE DRAWINGS; WRITTEN DIMENSIONS OVER SCALED DIMENSIONS.
4. FENCE SCOPE (SECTION 32 31 13): TYPE A 10'-0" PERIMETER FENCE, TYPE B 42" DIVIDER FENCE, SWING GATES G1, G2 AND G3, WINDSCREEN, FOOTINGS AND ACCESSORIES; FENCE GUARD PER SPECIAL CONDITIONS ITEM 16.
5. OTHER TRADES: SPECIAL CONDITIONS ITEMS 2-9 AND 17-21 ARE NOT PART OF SECTION 32 31 13 AND ARE SHOWN FOR REFERENCE ONLY (SECTION 01 1100, 1.2).
6. DIMENSIONS ARE TO CENTERLINE OF POSTS UNLESS NOTED OTHERWISE. DETAILS NOTED DIAGRAMMATIC OR N.T.S. SHALL NOT BE SCALED.
7. WHERE A DIMENSION, SIZE OR REQUIREMENT IS STATED AS NOT SPECIFIED, SUBMIT A WRITTEN REQUEST FOR INFORMATION AND DO NOT ASSUME IT (00 0200, 2.2; 00 0800, SC-3.2.1).
8. QUESTION DEADLINE AND BID DATE PER DOCUMENT 00 0200 AND ADDENDA. ACKNOWLEDGE EVERY ADDENDUM ON THE BID SCHEDULES, SHEET C102.
9. LABOR COMPLIANCE: SEE SECTION 00 0800, PARAGRAPH SC-3.4, AND DOCUMENT 00 0200, 4.1.5. THESE DRAWINGS DO NOT ESTABLISH WAGE RATES, CLASSIFICATIONS OR WHETHER PREVAILING-WAGE REQUIREMENTS APPLY.

ORDER OF PRECEDENCE (00 0800, SC-1.2)

1. ADDENDA (GOVERN OVER ALL OTHER CONTRACT DOCUMENTS).
2. SPECIAL CONDITIONS.
3. DIVISION 01 AND SPECIFICATION SECTIONS (SECTION 32 31 13).
4. DRAWINGS (G001, C101, C102, F501, F502).
5. WRITTEN DIMENSIONS GOVERN OVER SCALED DIMENSIONS.
6. WHERE DOCUMENTS OF EQUAL RANK CONFLICT, SUBMIT A WRITTEN REQUEST FOR INFORMATION BEFORE THE QUESTION DEADLINE.

IFI LABS
SYNTHETIC CAD
FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL

PROJECT
MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)


PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master_ANSI_B.FCStd
SHEET SIZE	ANSI B 17" × 11"

SHEET TITLE
COVER AND GENERAL NOTES
DRAWING INDEX AND PROJECT DATA

SHEET NUMBER
G001
SHEET 1 OF 5

DRAWING INDEX
- **G001** COVER AND GENERAL NOTES
- **C101** SITE / FENCE PLAN
- **C102** BID SCHEDULES
- **F501** FENCE AND FOOTING DETAILS
- **F502** GATE AND WINDSCREEN DETAILS


NO SEAL — FICTIONAL

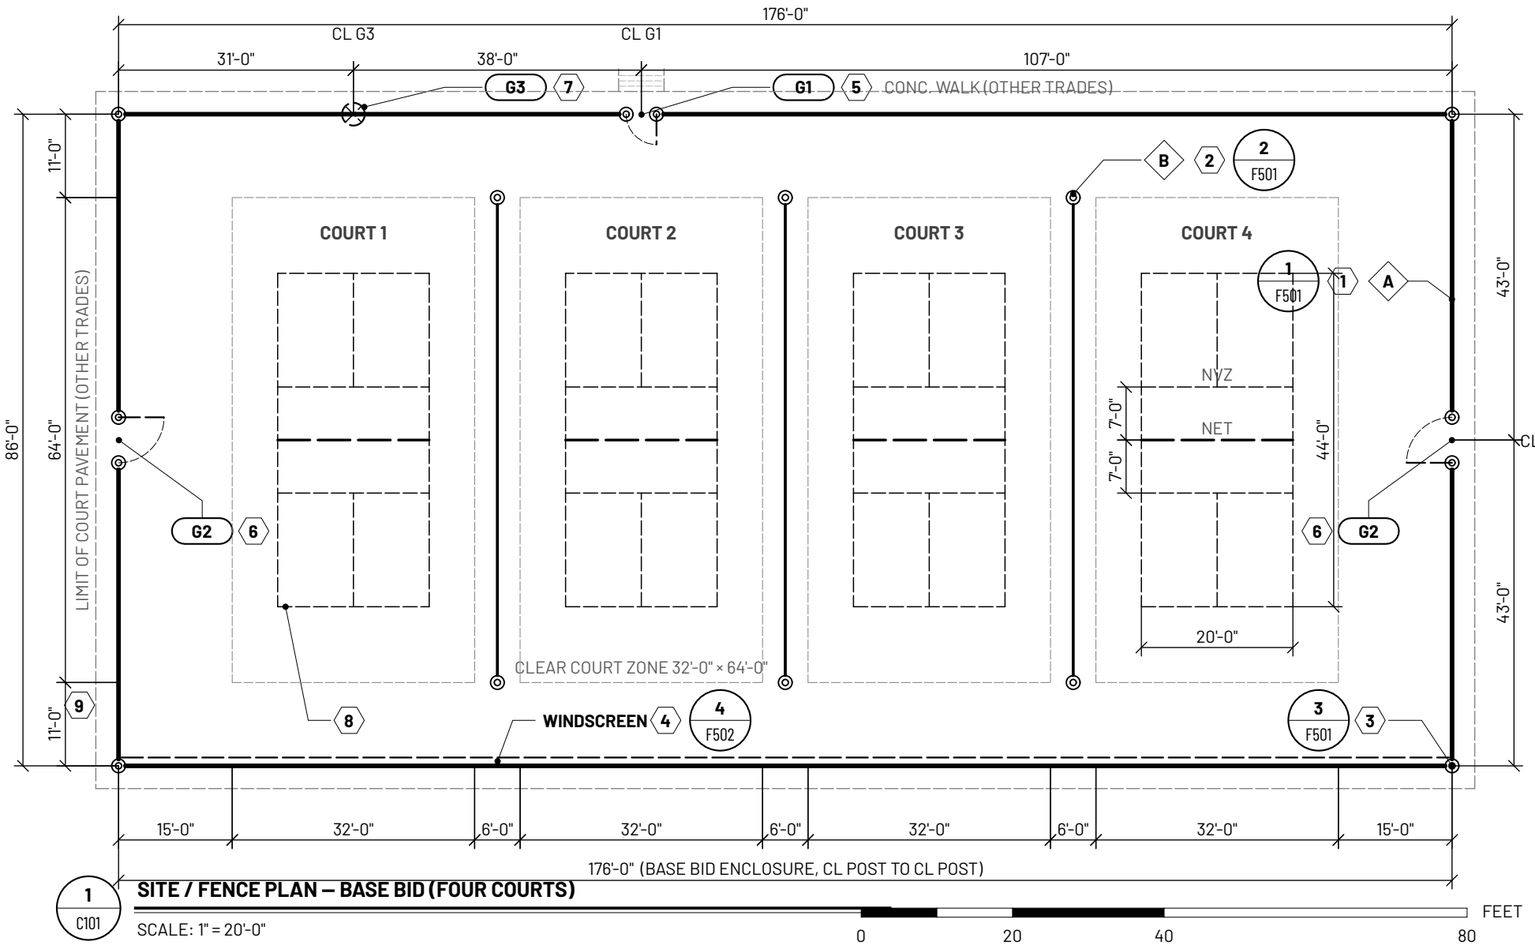

1 / C101 — SITE / FENCE PLAN — BASE BID (FOUR COURTS)

SCALE: 1" = 20'-0"

0 20 40 80 FEET

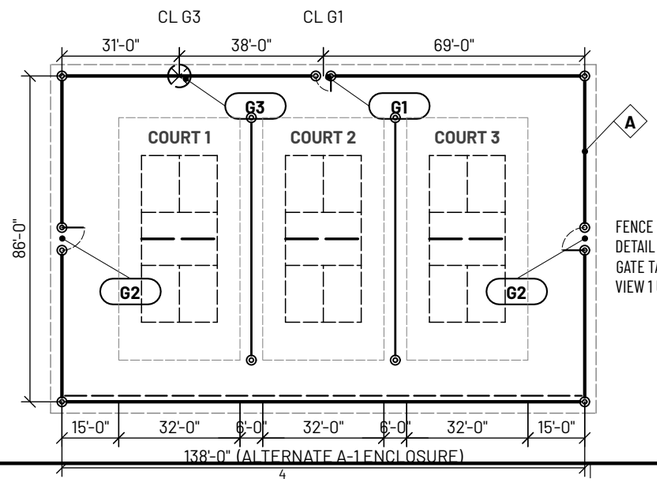

2 / C101 — BID ALTERNATE A-1 — THREE-COURT ENCLOSURE (IN LIEU OF BASE BID)

SCALE: 1" = 40'-0"

0 20 40 80 FEET

LEGEND

- 10'-0" HIGH CHAIN LINK FENCE — TYPE A
- 42" HIGH CHAIN LINK DIVIDER FENCE — TYPE B
- WINDSCREEN ON FENCE (INSIDE FACE)
- CORNER / TERMINAL / GATE POST (LINE POSTS NOT SHOWN)
- SWING GATE AND LEAF SWING
- GATE LOCATION — SYMBOL ONLY, N.T.S.
- PICKLEBALL PLAYING LINES (OTHER TRADES)
- CLEAR COURT ZONE LIMIT
- LIMIT OF COURT PAVEMENT (OTHER TRADES)
- A — FENCE TYPE TAG
- G# — GATE TAG
- # — KEYNOTE
- # / F5## — DETAIL NO. / SHEET NO.

FENCE TYPES, KEYNOTES, DETAIL REFERENCES AND GATE TAGS SAME AS VIEW 1 U.N.O.

N

PLAN NORTH

GENERAL NOTES

1. FICTIONAL SYNTHETIC DEMONSTRATION. NOT FOR CONSTRUCTION. NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER.
2. DIMENSIONS ARE TO CENTERLINE OF POSTS UNLESS NOTED OTHERWISE (SECTION 32 31 13, 3.1.B). WRITTEN DIMENSIONS GOVERN OVER SCALED DIMENSIONS. DO NOT SCALE.
3. GATE OPENING SIZES ARE NOT SHOWN ON THIS SHEET. SEE SHEET F502, SECTION 32 31 13 PARAGRAPH 2.5 AND ADDENDA.
4. LINE POSTS ARE NOT SHOWN. SPACE LINE POSTS EQUALLY BETWEEN TERMINAL, CORNER AND GATE POSTS AT 10'-0" ON CENTER MAXIMUM PER SECTION 32 31 13, PARAGRAPH 3.1.B.
5. FRAMEWORK, FABRIC, FITTINGS, FOOTINGS AND INSTALLATION PER SECTION 32 31 13 AND SHEETS F501 AND F502.
6. COURT PAVEMENT, BASE, SURFACING, PLAYING LINES, NETS, CONCRETE WALK AND OTHER WORK OF SPECIAL CONDITIONS ITEMS 2-9 AND 17-21 ARE PERFORMED BY OTHER TRADES, ARE SHOWN FOR REFERENCE AND ARE NOT PART OF SECTION 32 31 13 (SECTION 01 1100, 1.2).
7. COURT PAVEMENT EXTENDS 3'-0" BEYOND THE FENCE CENTERLINE; FOOTINGS FALL WITHIN THE PAVEMENT. SET POSTS AFTER HMA PLACEMENT AND CORE DRILL EVERY FOOTING HOLE (SECTION 32 31 13, 3.2.E; SECTION 01 1100, 1.4).
8. VERIFY DIMENSIONS AND LAYOUT IN THE FIELD BEFORE SETTING POSTS. LOCATE UTILITIES THROUGH THE STATE ONE-CALL SYSTEM (SECTION 32 31 13, 1.6).
9. ALTERNATE A-1 (VIEW 2) IS BID IN LIEU OF THE BASE BID (VIEW 1). QUANTIFY EACH OPTION INDEPENDENTLY. SEE C102.
10. LABOR COMPLIANCE: SEE SECTION 00 0800, PARAGRAPH SC-3.4. THESE DRAWINGS DO NOT ESTABLISH WAGE RATES, CLASSIFICATIONS OR WHETHER PREVAILING-WAGE REQUIREMENTS APPLY.
11. ADDENDA GOVERN OVER THE SPECIFICATIONS AND DRAWINGS (00 0200, 3.4.1; 00 0800, SC-1.2).

KEYNOTES

1. 10'-0" HIGH CHAIN LINK FENCE, TYPE A. SEE 1/F501.
2. 42" HIGH CHAIN LINK DIVIDER FENCE, TYPE B, WITH FENCE GUARD ON TOP RAIL. TERMINATE EACH END AT A TERMINAL POST IN LINE WITH THE CLEAR COURT ZONE LIMIT (32 31 13, 3.2.C); 11'-0" OPEN AISLE TO PERIMETER FENCE (NO GATE). SEE 2/F501.
3. CORNER POST WITH BRACE RAIL AND TRUSS ROD EACH DIRECTION, TYPICAL. FOOTINGS PER 3/F501.
4. WINDSCREEN ON INSIDE FACE OF SOUTH FENCE, FULL LENGTH BETWEEN CORNER POSTS. SEE 4/F502.
5. GATE G1. SEE 1/F502 AND SECTION 32 31 13, 2.5.
6. GATE G2, TWO LOCATIONS. SEE 2/F502 AND SECTION 32 31 13, 2.5.
7. GATE G3. LOCATION SHOWN BY SYMBOL ONLY, NOT TO SCALE; DO NOT SCALE OPENING FROM THIS SHEET. SEE 3/F502.
8. PICKLEBALL PLAYING LINES, 20'-0" x 44'-0" WITH 7'-0" NON-VOLLEY ZONES (OTHER TRADES).
9. LIMIT OF COURT PAVEMENT, 3'-0" OUTSIDE FENCE CENTERLINE (OTHER TRADES).

ABBREVIATIONS

CL	CENTERLINE	**N.T.S.**	NOT TO SCALE
CONC.	CONCRETE	**O.C.**	ON CENTER
LOC.	LOCATION(S)	**TYP.**	TYPICAL
MAX.	MAXIMUM	**U.N.O.**	UNLESS NOTED OTHERWISE
NVZ	NON-VOLLEY ZONE	**WS**	WINDSCREEN

FENCE AND GATE REFERENCE

TAG	DESCRIPTION	DETAIL	SPEC.
A	CHAIN LINK FENCE, 10'-0" HIGH, PERIMETER	1/F501	32 31 13
B	CHAIN LINK DIVIDER FENCE, 42" HIGH	2/F501	32 31 13
—	POST FOOTINGS, ALL FENCE TYPES	3/F501	32 31 13
WS	WINDSCREEN, SOUTH FENCE	4/F502	32 31 13
G1	SWING GATE, PEDESTRIAN	1/F502	32 31 13
G2	SWING GATE, MAINTENANCE (2 LOC.)	2/F502	32 31 13
G3	SWING GATE, SERVICE	3/F502	32 31 13

GATE SIZES, FRAMING AND HARDWARE ARE NOT SCHEDULED ON THIS SHEET; SEE F502, SECTION 32 31 13 PARA. 2.5 AND ADDENDA.

BID QUANTITIES: SEE C102 BID SCHEDULES.

IFI LABS

SYNTHETIC CAD
FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL

PROJECT

MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master_ANSI_B.FCStd
SHEET SIZE	ANSI B 17" × 11"

SHEET TITLE

SITE / FENCE PLAN
BASE BID AND ALTERNATE A-1

SHEET NUMBER

C101

SHEET 2 OF 5

DRAWING INDEX

G001 COVER AND GENERAL NOTES
C101 SITE / FENCE PLAN
C102 BID SCHEDULES
F501 FENCE AND FOOTING DETAILS
F502 GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL

SCHEDULE 1 — BASE BID (FOUR-COURT FACILITY, C101 VIEW 1)

ITEM	DESCRIPTION	UNIT	QUANTITY	REFERENCE	UNIT PRICE	AMOUNT
1	MOBILIZATION & TRAFFIC CONTROL, COMPLETE	LS	LUMP SUM	SC 1		
2	EARTHWORK, COMPLETE	LS	LUMP SUM	SC 2		
3	TOPSOIL, FURNISH AND PLACE	CY	BY BIDDER	SC 3		
4	AGGREGATE BASE, 8"	SY	BY BIDDER	SC 4		
5	ENGINEERED POLYMER GRID (CONTINGENCY)	SY	BY BIDDER	SC 5		
6	3" HMA SURFACE	SY	BY BIDDER	SC 6		
7	PCC SIDEWALK, 4"	SY	BY BIDDER	SC 7		
8	ACRYLIC COURT SURFACING	SY	BY BIDDER	SC 8		
9	NET, COMPLETE	EA	BY BIDDER	SC 9		
10	120" CHAINLINK FENCE (TYPE A)	LF	BY BIDDER	SC 10; 1/F501		
11	42" CHAINLINK DIVIDER FENCE (TYPE B)	LF	BY BIDDER	SC 11; 2/F501		
12	GATE G1, 48" WIDE, 84" TALL	EA	1	SC 12; 1/F502		
13	GATE G2, 72" WIDE, 84" TALL	EA	2	SC 13; 2/F502		
14	GATE G3, 84" TALL	EA	1	SC 14; 3/F502		
15	9' WINDSCREEN, COMPLETE	LF	BY BIDDER	SC 15; 4/F502		
16	FENCE GUARD	LF	BY BIDDER	SC 16; 2/F501		
17	BENCH, 6 FOOT	EA	BY BIDDER	SC 17		
18	SURFACE RESTORATION	SY	BY BIDDER	SC 18		
19	TURF REINFORCEMENT MAT	SY	BY BIDDER	SC 19		
20	ROLLED EROSION CONTROL PRODUCT, TYPE 2	SY	BY BIDDER	SC 20		
21	EROSION CONTROL, COMPLETE	LS	LUMP SUM	SC 21		
TOTAL BASE BID, ITEMS 1–21					$	

ITEMS 10–16: SECTION 32 31 13 / FENCE WORK. ITEMS 1–9 AND 17–21: OTHER TRADES (SECTION 01 1100, 1.2).

SCHEDULE 2 — ALTERNATE A-1 (THREE-COURT FACILITY, C101 VIEW 2), IN LIEU OF BASE BID

ITEM	DESCRIPTION	UNIT	QUANTITY	REFERENCE	UNIT PRICE	AMOUNT
1	MOBILIZATION & TRAFFIC CONTROL, COMPLETE	LS	LUMP SUM	SC 1		
2	EARTHWORK, COMPLETE	LS	LUMP SUM	SC 2		
3	TOPSOIL, FURNISH AND PLACE	CY	BY BIDDER	SC 3		
4	AGGREGATE BASE, 8"	SY	BY BIDDER	SC 4		
5	ENGINEERED POLYMER GRID (CONTINGENCY)	SY	BY BIDDER	SC 5		
6	3" HMA SURFACE	SY	BY BIDDER	SC 6		
7	PCC SIDEWALK, 4"	SY	BY BIDDER	SC 7		
8	ACRYLIC COURT SURFACING	SY	BY BIDDER	SC 8		
9	NET, COMPLETE	EA	BY BIDDER	SC 9		
10	120" CHAINLINK FENCE (TYPE A)	LF	BY BIDDER	SC 10; 1/F501		
11	42" CHAINLINK DIVIDER FENCE (TYPE B)	LF	BY BIDDER	SC 11; 2/F501		
12	GATE G1, 48" WIDE, 84" TALL	EA	1	SC 12; 1/F502		
13	GATE G2, 72" WIDE, 84" TALL	EA	2	SC 13; 2/F502		
14	GATE G3, 84" TALL	EA	1	SC 14; 3/F502		
15	9' WINDSCREEN, COMPLETE	LF	BY BIDDER	SC 15; 4/F502		
16	FENCE GUARD	LF	BY BIDDER	SC 16; 2/F501		
17	BENCH, 6 FOOT	EA	BY BIDDER	SC 17		
18	SURFACE RESTORATION	SY	BY BIDDER	SC 18		
19	TURF REINFORCEMENT MAT	SY	BY BIDDER	SC 19		
20	ROLLED EROSION CONTROL PRODUCT, TYPE 2	SY	BY BIDDER	SC 20		
21	EROSION CONTROL, COMPLETE	LS	LUMP SUM	SC 21		
TOTAL ALTERNATE A-1, ITEMS 1–21					$	

ITEMS 10–16: SECTION 32 31 13 / FENCE WORK. ITEMS 1–9 AND 17–21: OTHER TRADES (SECTION 01 1100, 1.2).

MEASUREMENT AND PAYMENT

ITEM	MEASUREMENT AND PAYMENT
TYPE A AND TYPE B FENCE	LINEAR FOOT ALONG FENCE CENTERLINE, CORNER TO CORNER, EXCLUDING GATE OPENINGS; TYPES MEASURED SEPARATELY (32 31 13, 1.5.A)
GATE OPENINGS	FACE OF GATE POST TO FACE OF GATE POST (32 31 13, 1.5.A)
GATES	PER EACH BY TAG, COMPLETE WITH POSTS, FOOTINGS, FRAME, FABRIC, HARDWARE AND ADJUSTMENT (32 31 13, 1.5.B)
WINDSCREEN	LINEAR FOOT ALONG SOUTH TYPE A FENCE BETWEEN CORNER POSTS (32 31 13, 1.5.C)
OTHER ITEMS	AS STATED FOR EACH ITEM IN THE SPECIAL CONDITIONS AND SECTION 01 2200

BID SCHEDULE NOTES

1. BID ITEMS, UNITS AND MEASUREMENT ARE AS ESTABLISHED IN THE SPECIAL CONDITIONS (BID ITEMS AND MEASUREMENT), SECTION 01 2200 AND SECTION 32 31 13, 1.5.
2. ENTER A UNIT PRICE AND EXTENDED PRICE FOR EACH ITEM FOR THE BASE BID AND FOR ALTERNATE A-1 (00 0200, 4.1). QUANTIFY EACH OPTION INDEPENDENTLY.
3. QUANTITY ENTRIES "BY BIDDER" ARE NOT FURNISHED BY THESE DOCUMENTS; THE BIDDER SHALL DETERMINE THEM. GATE COUNTS ARE FROM SECTION 32 31 13, 2.5.I.
4. GATE G3 CLEAR OPENING IS NOT SPECIFIED; SEE NOTE 4/F502. SUBMIT A REQUEST FOR INFORMATION; DO NOT ASSUME A WIDTH.
5. ALTERNATE A-1 IS BID IN LIEU OF THE BASE BID.
6. ADDENDA GOVERN OVER THE SPECIFICATIONS AND DRAWINGS, INCLUDING THIS SHEET. ACKNOWLEDGE EACH ADDENDUM BELOW BY NUMBER (00 0200, 3.4.2).
7. INCLUDE WITH THE BID THE LABOR CLASSIFICATION STATEMENT REQUIRED BY 00 0200, 4.1.5 AND SECTION 00 0800, SC-3.4.3.

ADDENDA ACKNOWLEDGMENT (00 0200, 3.4.2)

ADDENDUM NO.	DATE RECEIVED	BIDDER INITIALS

BIDDER

BIDDER INFORMATION	
BIDDER (FIRM NAME)	
ADDRESS / TELEPHONE	
AUTHORIZED SIGNATURE / TITLE	
DATE	
LABOR CLASSIFICATION STATEMENT ATTACHED (00 0200, 4.1.5)	[ ] YES

IFI LABS

SYNTHETIC CAD
FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL

PROJECT
MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	NONE
CAD FILE	DP001_Master_ANSI_B.FCStd
SHEET SIZE	ANSI B 17" × 11"


SHEET TITLE
BID SCHEDULES
BASE BID AND ALTERNATE A-1

SHEET NUMBER
C102
SHEET 3 OF 5

DRAWING INDEX

G001 COVER AND GENERAL NOTES
C101 SITE / FENCE PLAN
C102 BID SCHEDULES
F501 FENCE AND FOOTING DETAILS
F502 GATE AND WINDSCREEN DETAILS


NO SEAL — FICTIONAL

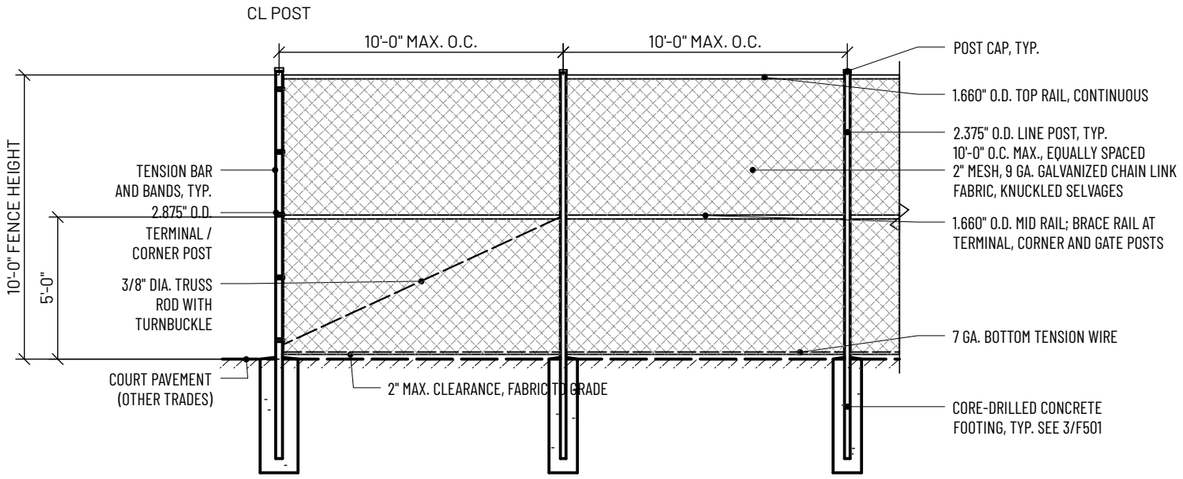

1 / F501

TYPE A — 10'-0" CHAIN LINK FENCE ELEVATION

SCALE: 3/16" = 1'-0"

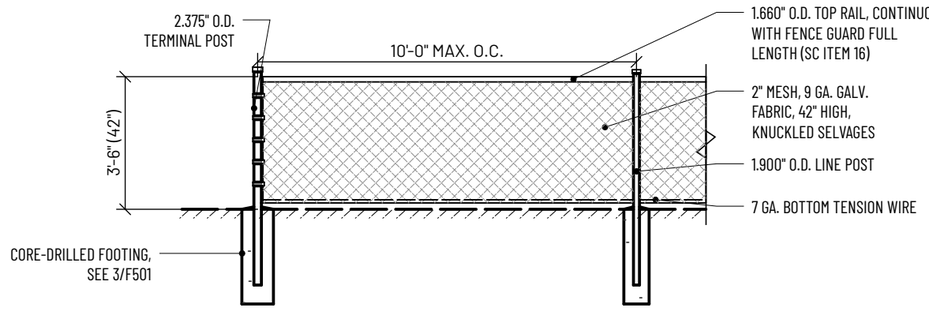


2 / F501

TYPE B — 42" DIVIDER FENCE ELEVATION


SCALE: 1/4" = 1'-0"

NOTE: NO MID RAIL OR BRACING REQUIRED FOR TYPE B.


TYPE A LINE POST

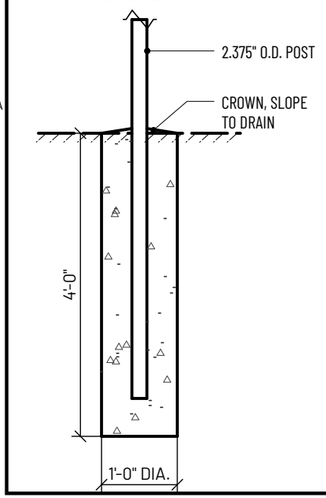


TYPE A CORNER, TERMINAL AND GATE POST

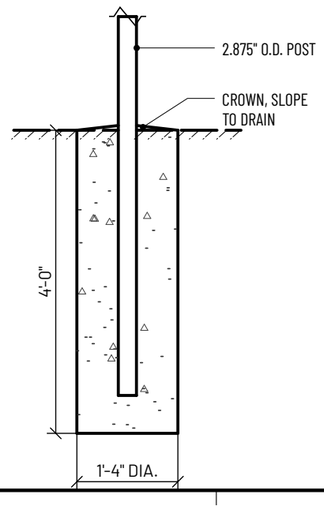

TYPE B LINE POST

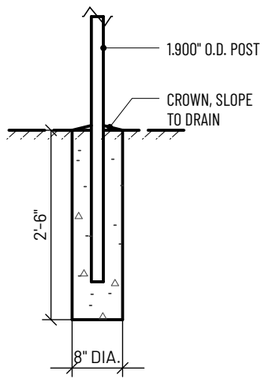

TYPE B TERMINAL POST

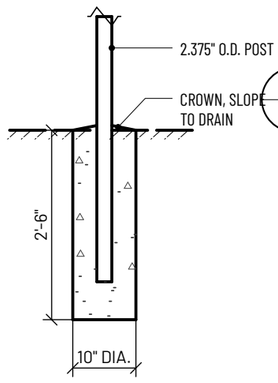

3 / F501

POST FOOTING SECTIONS

SCALE: 1/2" = 1'-0"

CONCRETE PER 32 31 13, 2.4. CORE DRILL EVERY FOOTING HOLE THROUGH COMPLETED COURT PAVEMENT AND BASE (32 31 13, 3.2.E). SET POSTS PLUMB; BRACE UNTIL CURED. DIAMETERS AND DEPTHS ARE MINIMUMS BELOW FINISH GRADE.

DETAIL NOTES

1. FICTIONAL SYNTHETIC DEMONSTRATION. NOT FOR CONSTRUCTION. NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER.
2. FENCE LOCATIONS AND TYPES ARE SHOWN ON C101. GATES AND WINDSCREEN ARE ON F502.
3. FRAMEWORK: HOT-DIP GALVANIZED STEEL PIPE, ASTM F1083, GROUP IA. SIZES ARE OUTSIDE DIAMETERS. MINIMUM WEIGHTS PER SECTION 32 31 13, 2.1.A.
4. SPACE LINE POSTS EQUALLY BETWEEN TERMINAL, CORNER AND GATE POSTS AT 10'-0" O.C. MAXIMUM (32 31 13, 3.1.B).
5. TOP RAIL CONTINUOUS THROUGH LINE POSTS. TYPE A: MID RAIL AT 5'-0" ABOVE GRADE; BRACE RAIL AND TRUSS ROD AT EACH TERMINAL AND GATE POST AND EACH DIRECTION AT CORNER POSTS. TYPE B: NO MID RAIL OR BRACING (32 31 13, 3.3).
6. FABRIC ON COURT (INSIDE) FACE OF POSTS. TIE TO LINE POSTS AT 12" O.C. AND TO RAILS AND TENSION WIRE AT 24" O.C.; TENSION BARS AND BANDS AT TERMINAL, CORNER AND GATE POSTS (32 31 13, 3.4).
7. FOOTINGS PER 3/F501; DIAMETERS AND DEPTHS ARE MINIMUMS BELOW FINISH GRADE. CONCRETE PER 32 31 13, 2.4. CORE DRILL EVERY FOOTING HOLE THROUGH THE COMPLETED COURT PAVEMENT AND BASE (32 31 13, 3.2.E).
8. FENCE GUARD: ON TOP RAIL OF TYPE B DIVIDER FENCE, FULL LENGTH, PER MANUFACTURER (SPECIAL CONDITIONS ITEM 16).
9. COURT PAVEMENT, BASE AND SURFACING ARE BY OTHER TRADES. REPAIR PAVEMENT DAMAGED BY THE FENCE WORK (32 31 13, 3.8).
10. LABOR COMPLIANCE: SEE SECTION 00 0800, PARAGRAPH SC-3.4.

FENCE MATERIAL SCHEDULE

COMPONENT	TYPE A — 10'-0" PERIMETER	TYPE B — 42" DIVIDER
FABRIC	2" MESH, 9 GA. CORE, GALV., 10'-0" NOMINAL HEIGHT, KK/KK	2" MESH, 9 GA. CORE, GALV., 42" HEIGHT, KK/KK
LINE POST	2.375" O.D., 10'-0" O.C. MAX.	1.900" O.D., 10'-0" O.C. MAX.
TERMINAL / CORNER POST	2.875" O.D.	2.375" O.D.
GATE POST	SEE F502 GATE SCHEDULE	N/A
TOP RAIL	1.660" O.D., CONTINUOUS	1.660" O.D., CONTINUOUS
MID RAIL / BRACE RAIL	1.660" O.D. AT 5'-0"	NONE
TRUSS ROD	3/8" DIA. W/ TURNBUCKLE AT EA. BRACE	NONE
BOTTOM TENSION WIRE	7 GA. COIL SPRING, 3" ABOVE GRADE	7 GA. COIL SPRING, 3" ABOVE GRADE
FOOTING — LINE POST	1'-0" DIA. × 4'-0" DEEP	8" DIA. × 2'-6" DEEP
FOOTING — TERMINAL / GATE	1'-4" DIA. × 4'-0" DEEP	10" DIA. × 2'-6" DEEP
FENCE GUARD	NONE	ON TOP RAIL, FULL LENGTH (SC ITEM 16)
FOOTING INSTALLATION	CORE DRILLED THROUGH PAVEMENT	CORE DRILLED THROUGH PAVEMENT
DETAIL	1/F501, 3/F501	2/F501, 3/F501

IFI LABS

SYNTHETIC CAD
FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL

PROJECT

MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master_ANSI_B.FCStd
SHEET SIZE	ANSI B 17" × 11"

SHEET TITLE

FENCE AND FOOTING DETAILS
FENCE TYPES A AND B

SHEET NUMBER


F501

SHEET 4 OF 5

DRAWING INDEX

G001 COVER AND GENERAL NOTES
C101 SITE / FENCE PLAN
C102 BID SCHEDULES
F501 FENCE AND FOOTING DETAILS
F502 GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL

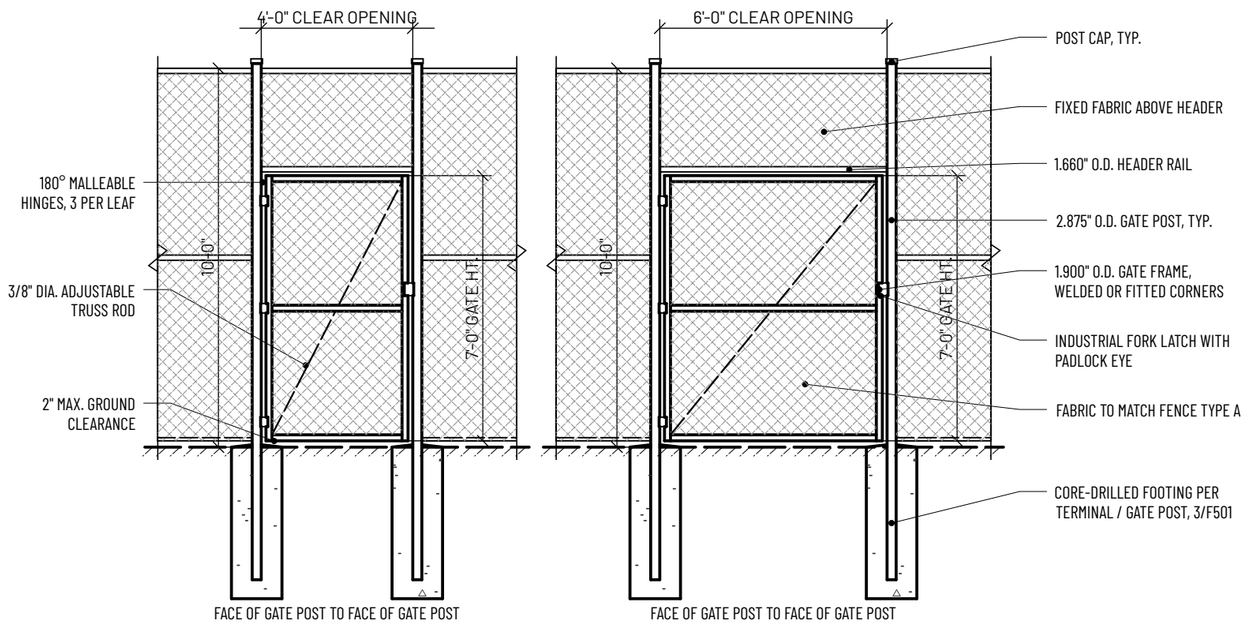

1 / F502 GATE G1 — PEDESTRIAN SWING GATE


SCALE: 1/4" = 1'-0"

2 / F502 GATE G2 — MAINTENANCE SWING GATE

SCALE: 1/4" = 1'-0"

3 / F502 GATE G3 — SERVICE SWING GATE

N.T.S. — DIAGRAMMATIC

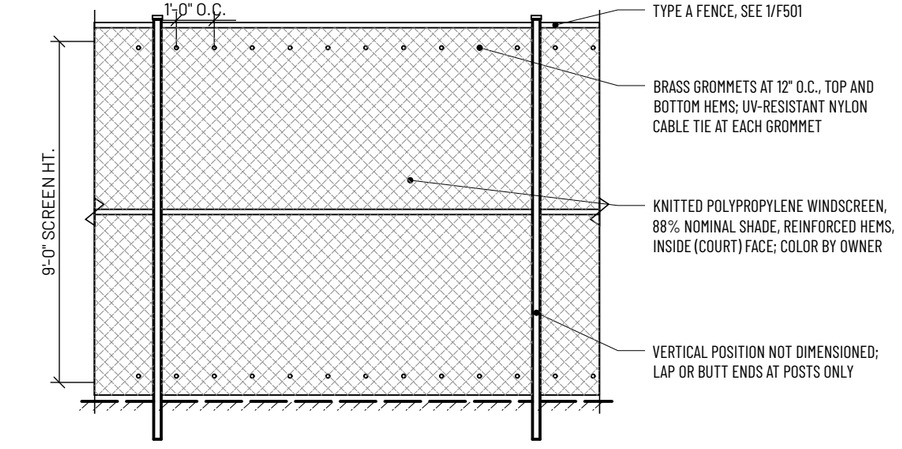

4 / F502 WINDSCREEN ELEVATION — SOUTH FENCE (VIEWED FROM COURT SIDE)

SCALE: 1/4" = 1'-0"

GATE HARDWARE

HARDWARE ITEM	G1	G2	G3
HINGES	180° MALLEABLE, 3 PER LEAF	180° MALLEABLE, 3 PER LEAF	180° MALLEABLE, 3 PER LEAF
LATCH	FORK LATCH, PADLOCK EYE	FORK LATCH, PADLOCK EYE	FORK LATCH, PADLOCK EYE
HOLD-BACK	1 PER LEAF	1 PER LEAF	1 PER LEAF
PADLOCK	BY OWNER	BY OWNER	BY OWNER
TRUSS ROD	3/8" ADJUSTABLE, 1 PER LEAF	3/8" ADJUSTABLE, 1 PER LEAF	3/8" ADJUSTABLE, 1 PER LEAF
GATE POST	2.875" O.D.	2.875" O.D.	NOT SPECIFIED - SEE NOTE 4
GATE POST FOOTING	3/F501 TERMINAL / GATE	3/F501 TERMINAL / GATE	SEE NOTE 4

GATE AND WINDSCREEN NOTES

1. FICTIONAL SYNTHETIC DEMONSTRATION. NOT FOR CONSTRUCTION. NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL ENGINEER.
2. GATE LOCATIONS ARE SHOWN ON C101. SWING GATES PER ASTM F900; GATES SWING INTO THE COURT ENCLOSURE (32 31 13, 2.5).
3. GATE FRAMES 1.900" O.D.; HEADER RAIL 1.660" O.D. BETWEEN GATE POSTS WITH FIXED FABRIC ABOVE TO TOP OF FENCE; FABRIC TO MATCH TYPE A. ONE ADJUSTABLE 3/8" TRUSS ROD PER LEAF.
4. GATE G3: CLEAR OPENING WIDTH IS NOT SPECIFIED AND GATE POST SIZE IS NOT SPECIFIED (32 31 13, 2.1.B). DETAIL 3/F502 IS DIAGRAMMATIC; THE GAP BETWEEN BREAK LINES IS NOT A DIMENSION. DO NOT SCALE OR ASSUME. SUBMIT A WRITTEN REQUEST FOR INFORMATION BEFORE THE QUESTION DEADLINE (00 0200, 2.2 AND 3.2).
5. GATE POSTS AND FOOTINGS NOT OTHERWISE NOTED: AS FOR TERMINAL POSTS, 3/F501 (32 31 13, 3.2.D). CORE DRILL FOOTINGS THROUGH COURT PAVEMENT.
6. WINDSCREEN: 9'-0" HIGH, INSIDE FACE OF SOUTH TYPE A FENCE, FULL LENGTH BETWEEN CORNER POSTS. FIELD MEASURE INSTALLED FENCE BEFORE ORDERING. LAP OR BUTT PANEL ENDS AT POSTS ONLY; TIE AT EACH GROMMET. COLOR BY OWNER (32 31 13, 2.6 AND 3.6).
7. ADDENDA GOVERN OVER THIS SHEET. GATE REQUIREMENTS MAY BE REVISED BY ADDENDUM.
8. LABOR COMPLIANCE: SEE SECTION 00 0800, PARAGRAPH SC-3.4.

GATE SCHEDULE

TAG	TYPE	CLEAR OPENING	HEIGHT	LEAVES	GATE POST	FRAME	HINGES	LATCH	BASE	ALT A-1	DETAIL
G1	PEDESTRIAN SWING	4'-0"	7'-0"	1	2.875" O.D.	1.900" O.D.	3 PER LEAF	FORK, PADLOCK EYE	1	1	1/F502
G2	MAINTENANCE SWING	6'-0"	7'-0"	1	2.875" O.D.	1.900" O.D.	3 PER LEAF	FORK, PADLOCK EYE	2	2	2/F502
G3	SERVICE SWING	NOT SPECIFIED – SEE NOTE 4	7'-0"	1	NOT SPECIFIED	1.900" O.D.	3 PER LEAF	FORK, PADLOCK EYE	1	1	3/F502

QUANTITIES ARE GATE COUNTS PER OPTION (EA). CLEAR OPENING IS FACE OF POST TO FACE OF POST.

BID QUANTITIES: SEE C102.

IFI LABS

SYNTHETIC CAD
FICTIONAL DEMONSTRATION DESIGNER
NO PROFESSIONAL REGISTRATION CLAIMED · NO ENGINEER'S SEAL

FICTIONAL SYNTHETIC DEMONSTRATION — NOT FOR CONSTRUCTION
NOT PREPARED, SIGNED OR SEALED BY A LICENSED PROFESSIONAL

PROJECT
MUNICIPAL RECREATION COURTS
DEMONSTRATION PACKAGE 001
FOUR-COURT PICKLEBALL FACILITY WITH THREE-COURT BID ALTERNATE A-1
FICTIONAL SITE — NO REAL ADDRESS · OWNER: FICTIONAL MUNICIPAL OWNER

REVISIONS

NO.	DATE	DESCRIPTION
0	10/12/26	ISSUED FOR BID (SYNTHETIC)

PROJECT NO.	DP-001
ISSUE	ISSUED FOR BID
ISSUE DATE	OCTOBER 12, 2026
DRAWN BY	IFI LABS / SYNTHETIC CAD
CHECKED BY	HUMAN REVIEW PENDING
SCALE	AS NOTED
CAD FILE	DP001_Master_ANSI_B.FCStd
SHEET SIZE	ANSI B 17" × 11"

SHEET TITLE
GATE AND WINDSCREEN DETAILS
GATES G1, G2, G3 AND WINDSCREEN

SHEET NUMBER
F502
SHEET 5 OF 5

DRAWING INDEX
G001 COVER AND GENERAL NOTES
C101 SITE / FENCE PLAN
C102 BID SCHEDULES
F501 FENCE AND FOOTING DETAILS
F502 GATE AND WINDSCREEN DETAILS

NO SEAL — FICTIONAL